

MultiControl dummy plug

The MultiControl features 4 RollerDrive, 2 communication and 4 sensor or I/O connections. If all connections are occupied, then the MultiControl has a protection rating of IP54. Based on the application, it is also possible that not all connections are occupied. If the protection rating of IP54 is to be maintained in such cases, then it is necessary to close the connections. The dummy plug package contains as many pugs as needed if the MultiControl has only the minimum connections.

Dummy plug package			
MultiControl connection	Dummy plug size	Use	Dummy plugs included
RollerDrive	M8	Insert	3
Sensor or I/O	M8	Screw	3
Communication	M12	Screw	1

The dummy plugs are delivered prefabricated for the required connections.

Article number: S-1104466


Technical data

- Temperature range: -30 to +40 °C
- Color: Black

Cable bridge for flat cable

The cable bridge allows electrically combining two flat cables and changing the position of one flat cable. The ends of both flat cables have to point in the same direction.

Article number: S-1004028

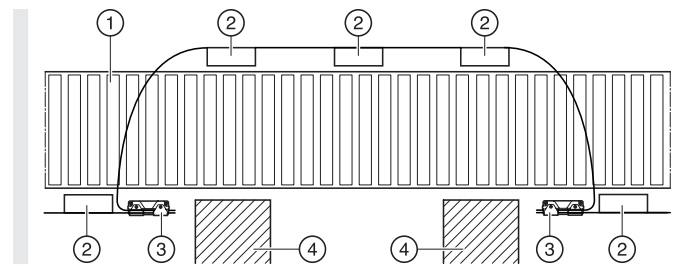

- 1 Conveyor system
- 2 SegmentControl or ComControl
- 3 Cable bridge
- 4 Obstacle (wall, column or similar)

Technical data

- Temperature range: -30 to +40 °C
- Protection rating: IP54
- Suitable for the communication cable of the ConveyorControl system
- Suitable for the voltage line of the ConveyorControl system or the MultiControl: can be loaded up to 6 A